

Input data

System of measurement		Metric
Input type		Coupling for electric motor
Input speed	[rpm]	1400
Output speed	[rpm]	140
Ratio (i=)		10
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.75
Service factor		1.7
Rated Power P1	[kW]	1.31

Output data

Gear unit F RS 50 PC 10 80 B14 AC 24 B3

Type		RS - Worm speed reducers
Input type		F (Elastic coupling)
Size		50
Ratio (i=)		10
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	140
Rated output torque	[Nm]	42.98
Service Factor		1.7
Efficiency		0.84
Inertia moment	[kgm ²]	0.000054

Gear unit configuration

Output shaft	Hollow output shaft
Fixing	Shaft mounting
Version	PC

Output radial and axial loads





Ball bearings output radial load	[N]	1450
Taper bearings output radial load	[N]	2000
Ball bearings output axial load	[N]	290
Taper bearings output axial load	[N]	400

Accessories


Hollow output shaft	AC 24
---------------------	-------

Electric motor coupling

Size		80 B4
Poles n.		4
Power	[kW]	0.75

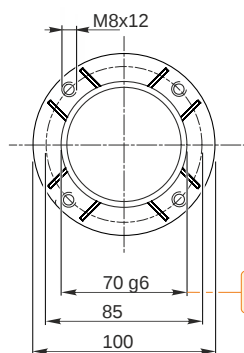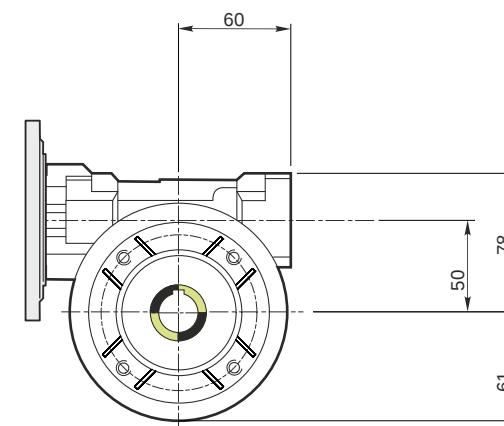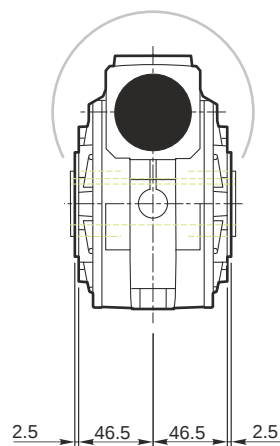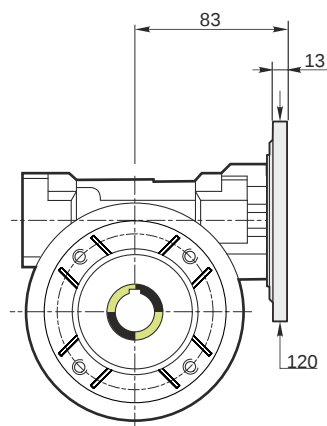






Hollow output shaft




69.99
69.971

24.021
24.000



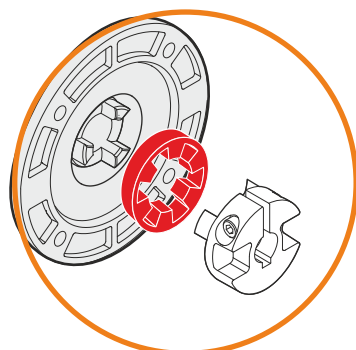


This gear unit is provided with an elastic coupling motor fitting

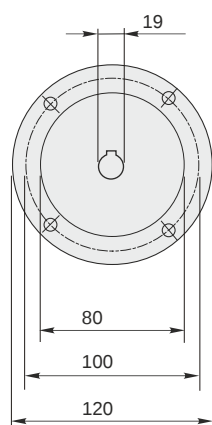

Mounting positions

B3




B6




B7




B8



V5



V6



0.13



← Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

Gear unit [kg] 3.8

Gearing data

Axial module 2.5
Number of starts 3
Lead angle 16° 41'
Pressure angle 20°

Backdriving

Static back-driving
Quick back-driving
Dynamic back-driving