

Input data

System of measurement		Metric
Input type		Coupling for electric motor
Input speed	[rpm]	1400
Output speed	[rpm]	28.57
Ratio (i=)		49
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.75
Service factor		1.1
Rated Power P1	[kW]	0.84

Output data

Gear unit F RS 70 PC 49 80 B14 AC 28 B3

Type		RS - Worm speed reducers
Input type		F (Elastic coupling)
Size		70
Ratio (i=)		49
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	28.57
Rated output torque	[Nm]	167.96
Service Factor		1.1
Efficiency		0.67
Inertia moment	[kgm ²]	0.000245

Gear unit configuration

Output shaft	Hollow output shaft
Fixing	Shaft mounting
Version	PC

Output radial and axial loads





Ball bearings output radial load	[N]	5200
Taper bearings output radial load	[N]	6900
Ball bearings output axial load	[N]	1040
Taper bearings output axial load	[N]	1380

Accessories


Hollow output shaft	AC 28
---------------------	-------

Electric motor coupling

Size		80 B4
Poles n.		4
Power	[kW]	0.75

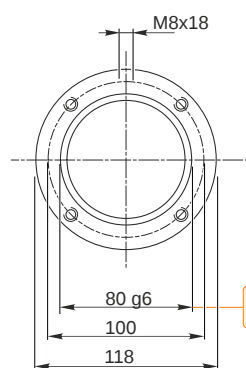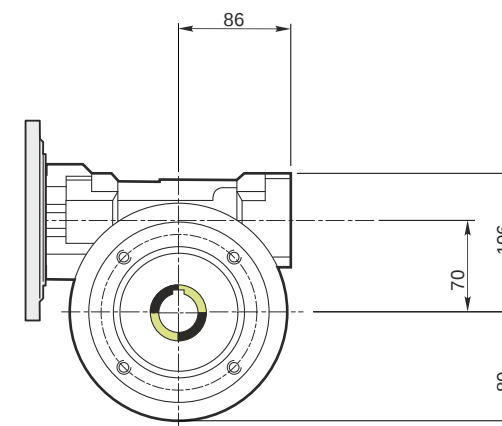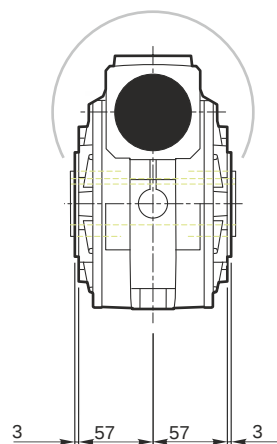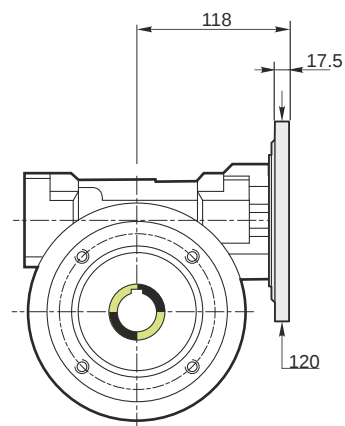






Hollow output shaft




79.99
79.971

28.021
28.000



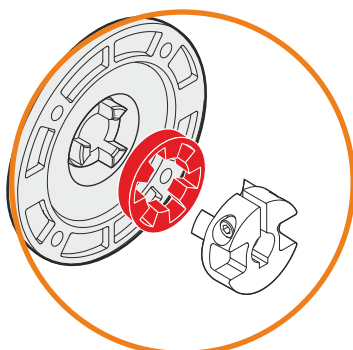


This gear unit is provided with an elastic coupling motor fitting

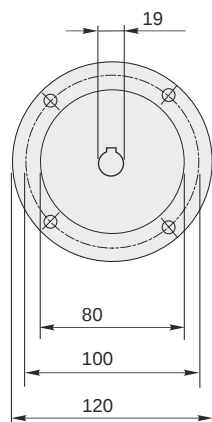


Mounting positions


B3




B6




B7




B8



V5



V6




0.35



← Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

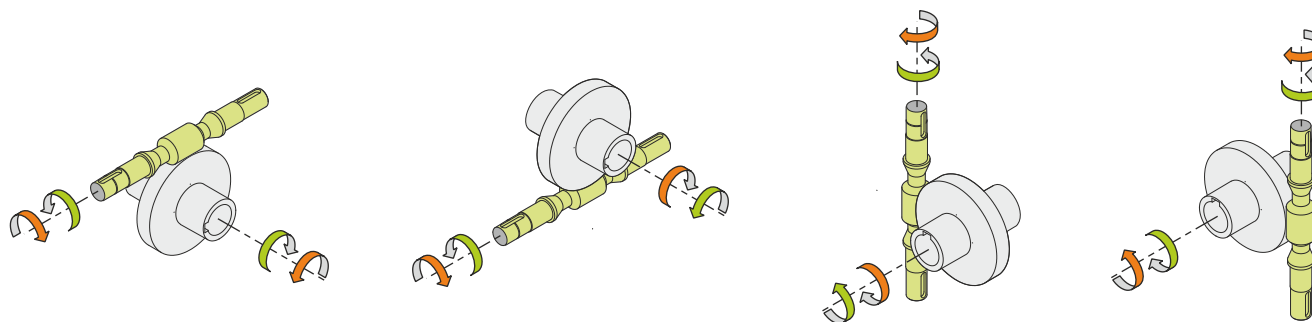

Weight

Gear unit [kg] 9

Gearing data

Axial module	2.3
Number of starts	1
Lead angle	4° 48'
Pressure angle	20°

Backdriving

Static self-locking
Slow back-driving in case of vibrations
Low dynamic back-driving