

### Input data

|                       |       |            |
|-----------------------|-------|------------|
| System of measurement |       | Metric     |
| Input type            |       | Gear motor |
| Input speed           | [rpm] | 1400       |
| Output speed          | [rpm] | 18.47      |
| Ratio (i=)            |       | 75.78      |
| Frequency             | [Hz]  | 50         |
| Input options         |       | IEC        |
| Requested input power | [kW]  | 0.13       |
| Service factor        |       | 0.8        |
| Rated Power P1        | [kW]  | 0.11       |

### Output data

|                  |                                                                    |
|------------------|--------------------------------------------------------------------|
| <b>Gear unit</b> | <b>M RD 03 B3 H1 75.78 63 B14 AU 20x40 MT 0.13 kW 63 A4 B14 X3</b> |
|------------------|--------------------------------------------------------------------|

|                     |                     |                        |
|---------------------|---------------------|------------------------|
| Type                |                     | RD - Helical gearboxes |
| Input type          |                     | M                      |
| Size                |                     | 03                     |
| Ratio (i=)          |                     | 75.78                  |
| Input flange        |                     | B14                    |
| Mounting position   |                     | H1                     |
| Input speed         | [rpm]               | 1400                   |
| Output speed        | [rpm]               | 18.47                  |
| Rated output torque | [Nm]                | 63.17                  |
| Service Factor      |                     | 0.8                    |
| Efficiency          |                     | 0.94                   |
| Inertia moment      | [kgm <sup>2</sup> ] | 0.000063               |

#### Gear unit configuration

|              |  |          |
|--------------|--|----------|
| Fixing       |  | Feet     |
| Output shaft |  | AU 20x40 |

#### Output radial and axial loads


|                    |     |      |
|--------------------|-----|------|
| Output radial load | [N] | 1200 |
| Output axial load  | [N] | 240  |

#### Electric motor

|       |      |       |
|-------|------|-------|
| Size  |      | 63 A4 |
| Poles |      | 4     |
| Power | [kW] | 0.13  |


#### Electric motor configuration

|                       |  |     |
|-----------------------|--|-----|
| Motor flange          |  | B14 |
| Terminal box position |  | X3  |

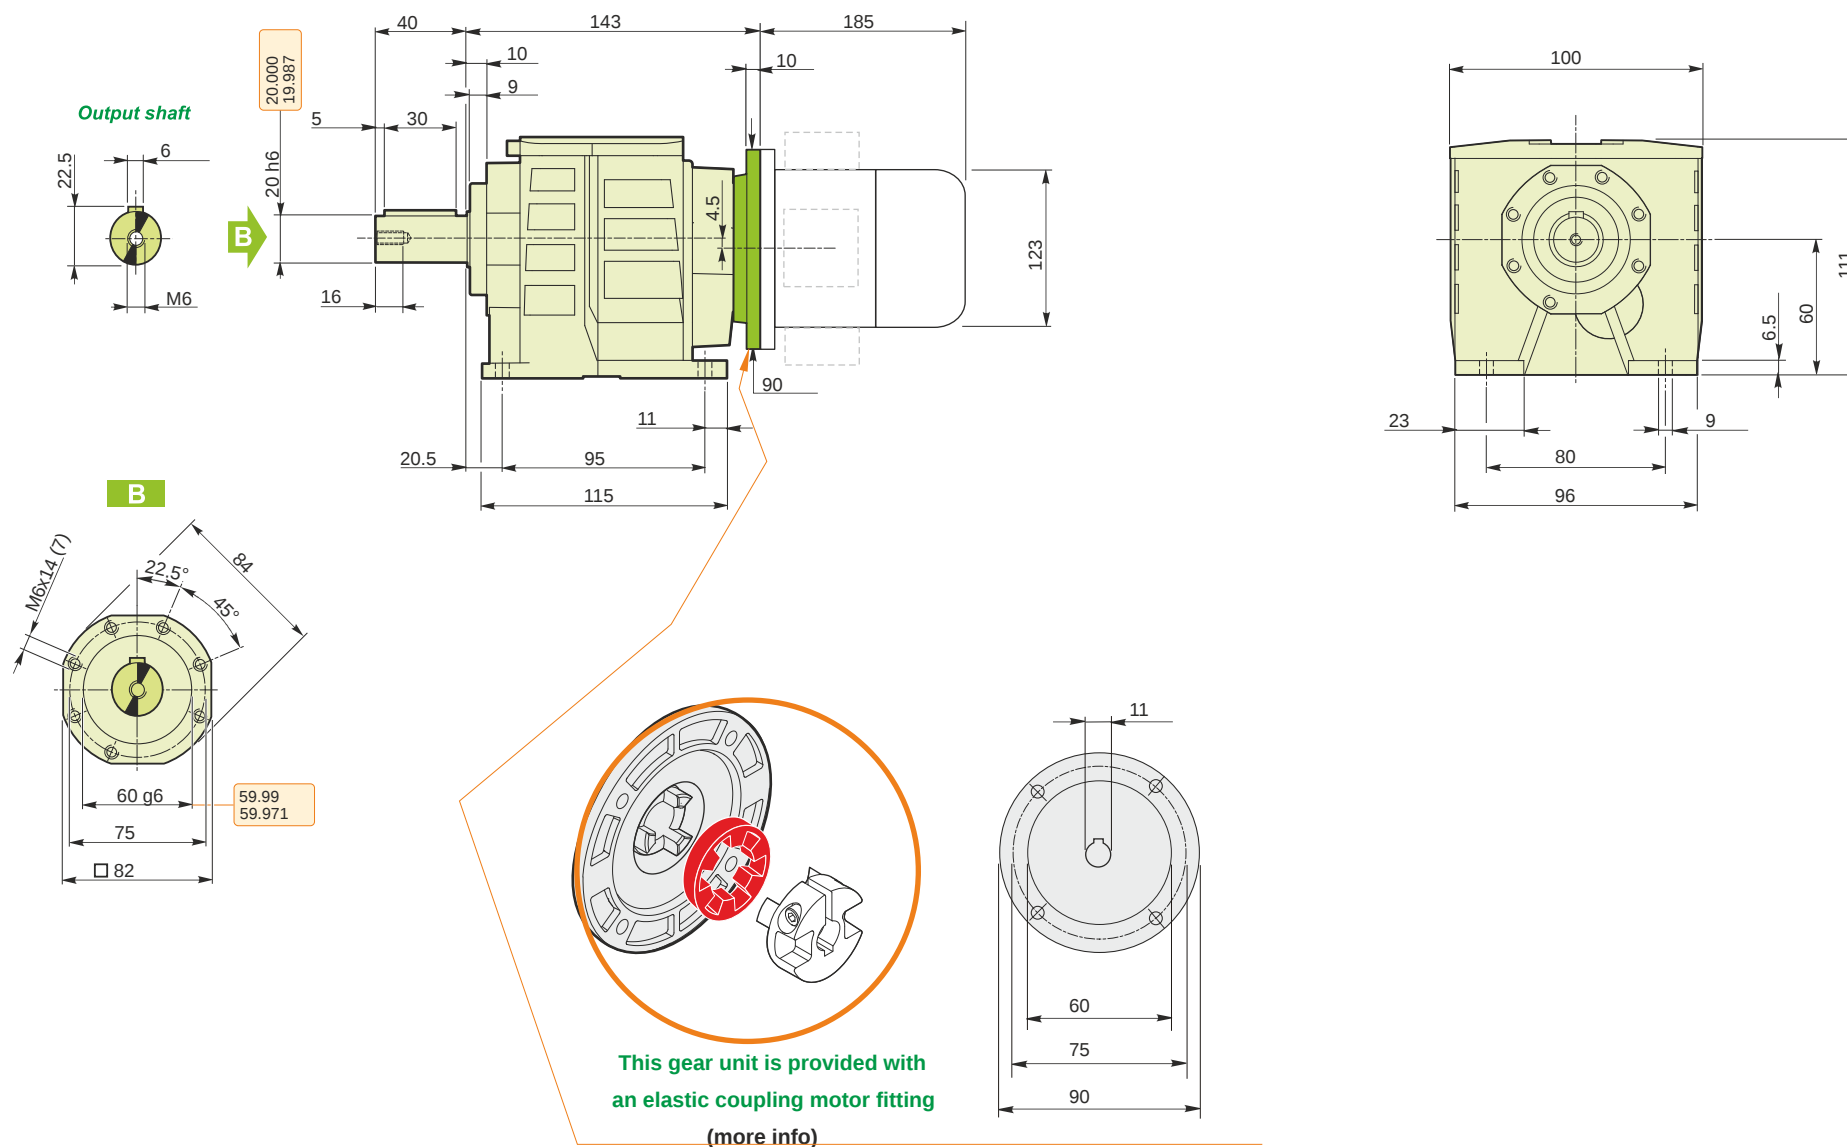

**M RD 03 B3 H1 75.78 63 B14 AU 20x40 MT 0.13 kW 63 A4 B14 X3**

## Mounting positions

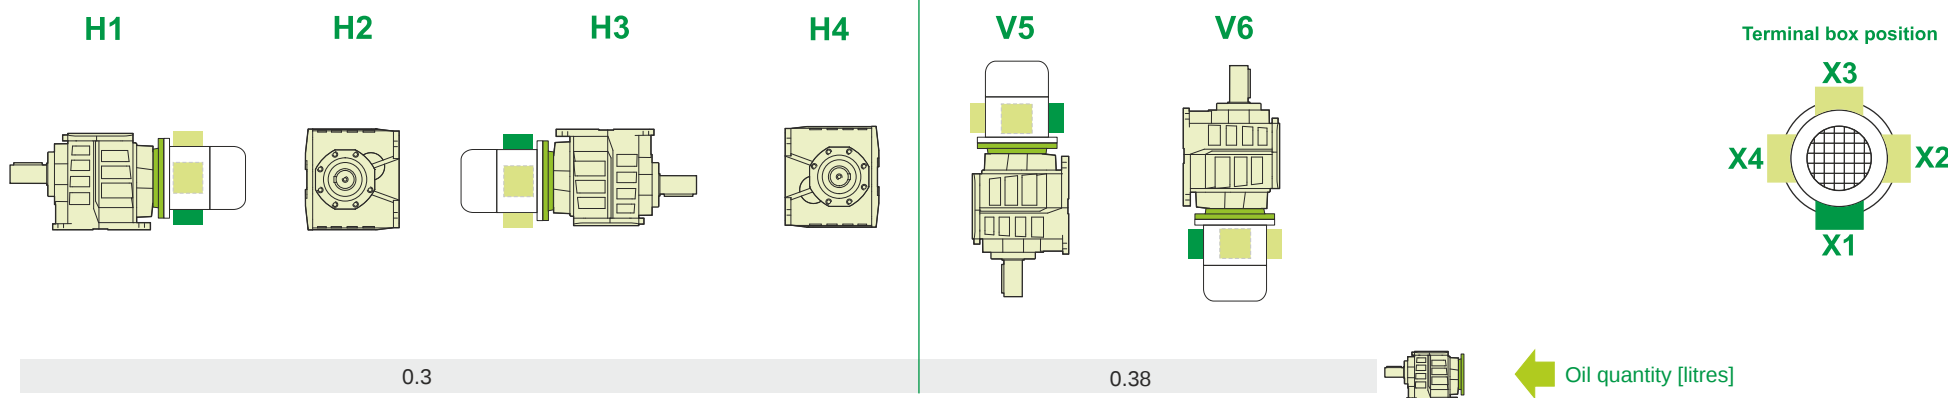

Lubricant type: Long life synthetic oil ISO VG320

## Direction of rotation



## Weight

|                     |     |
|---------------------|-----|
| Gear unit [kg]      | 3.2 |
| Electric motor [kg] | 4.3 |

**M RD 03 B3 H1 75.78 63 B14 AU 20x40 MT 0.13 kW 63 A4 B14 X3**