

### Input data

|                       |       |            |
|-----------------------|-------|------------|
| System of measurement |       | Metric     |
| Input type            |       | Gear motor |
| Input speed           | [rpm] | 1400       |
| Output speed          | [rpm] | 5.21       |
| Ratio (i=)            |       | 268.54     |
| Frequency             | [Hz]  | 50         |
| Input options         |       | IEC        |
| Requested input power | [kW]  | 0.06       |
| Service factor        |       | 1          |
| Rated Power P1        | [kW]  | 0.06       |

### Output data

|                  |                                                                   |
|------------------|-------------------------------------------------------------------|
| <b>Gear unit</b> | <b>M RD 13 B3 H1 268.54 56 B5 AU 25x50 MT 0.06 kW 56 A4 B5 X3</b> |
|------------------|-------------------------------------------------------------------|

|                     |                     |                        |
|---------------------|---------------------|------------------------|
| Type                |                     | RD - Helical gearboxes |
| Input type          |                     | M                      |
| Size                |                     | 13                     |
| Ratio (i=)          |                     | 268.54                 |
| Input flange        |                     | B5                     |
| Mounting position   |                     | H1                     |
| Input speed         | [rpm]               | 1400                   |
| Output speed        | [rpm]               | 5.21                   |
| Rated output torque | [Nm]                | 103.32                 |
| Service Factor      |                     | 1                      |
| Efficiency          |                     | 0.94                   |
| Inertia moment      | [kgm <sup>2</sup> ] | 0.000194               |

#### Gear unit configuration

|              |  |          |
|--------------|--|----------|
| Fixing       |  | Feet     |
| Output shaft |  | AU 25x50 |

#### Output radial and axial loads


|                    |     |      |
|--------------------|-----|------|
| Output radial load | [N] | 2000 |
| Output axial load  | [N] | 400  |

#### Electric motor

|       |      |       |
|-------|------|-------|
| Size  |      | 56 A4 |
| Poles |      | 4     |
| Power | [kW] | 0.06  |


#### Electric motor configuration

|                       |  |    |
|-----------------------|--|----|
| Motor flange          |  | B5 |
| Terminal box position |  | X3 |

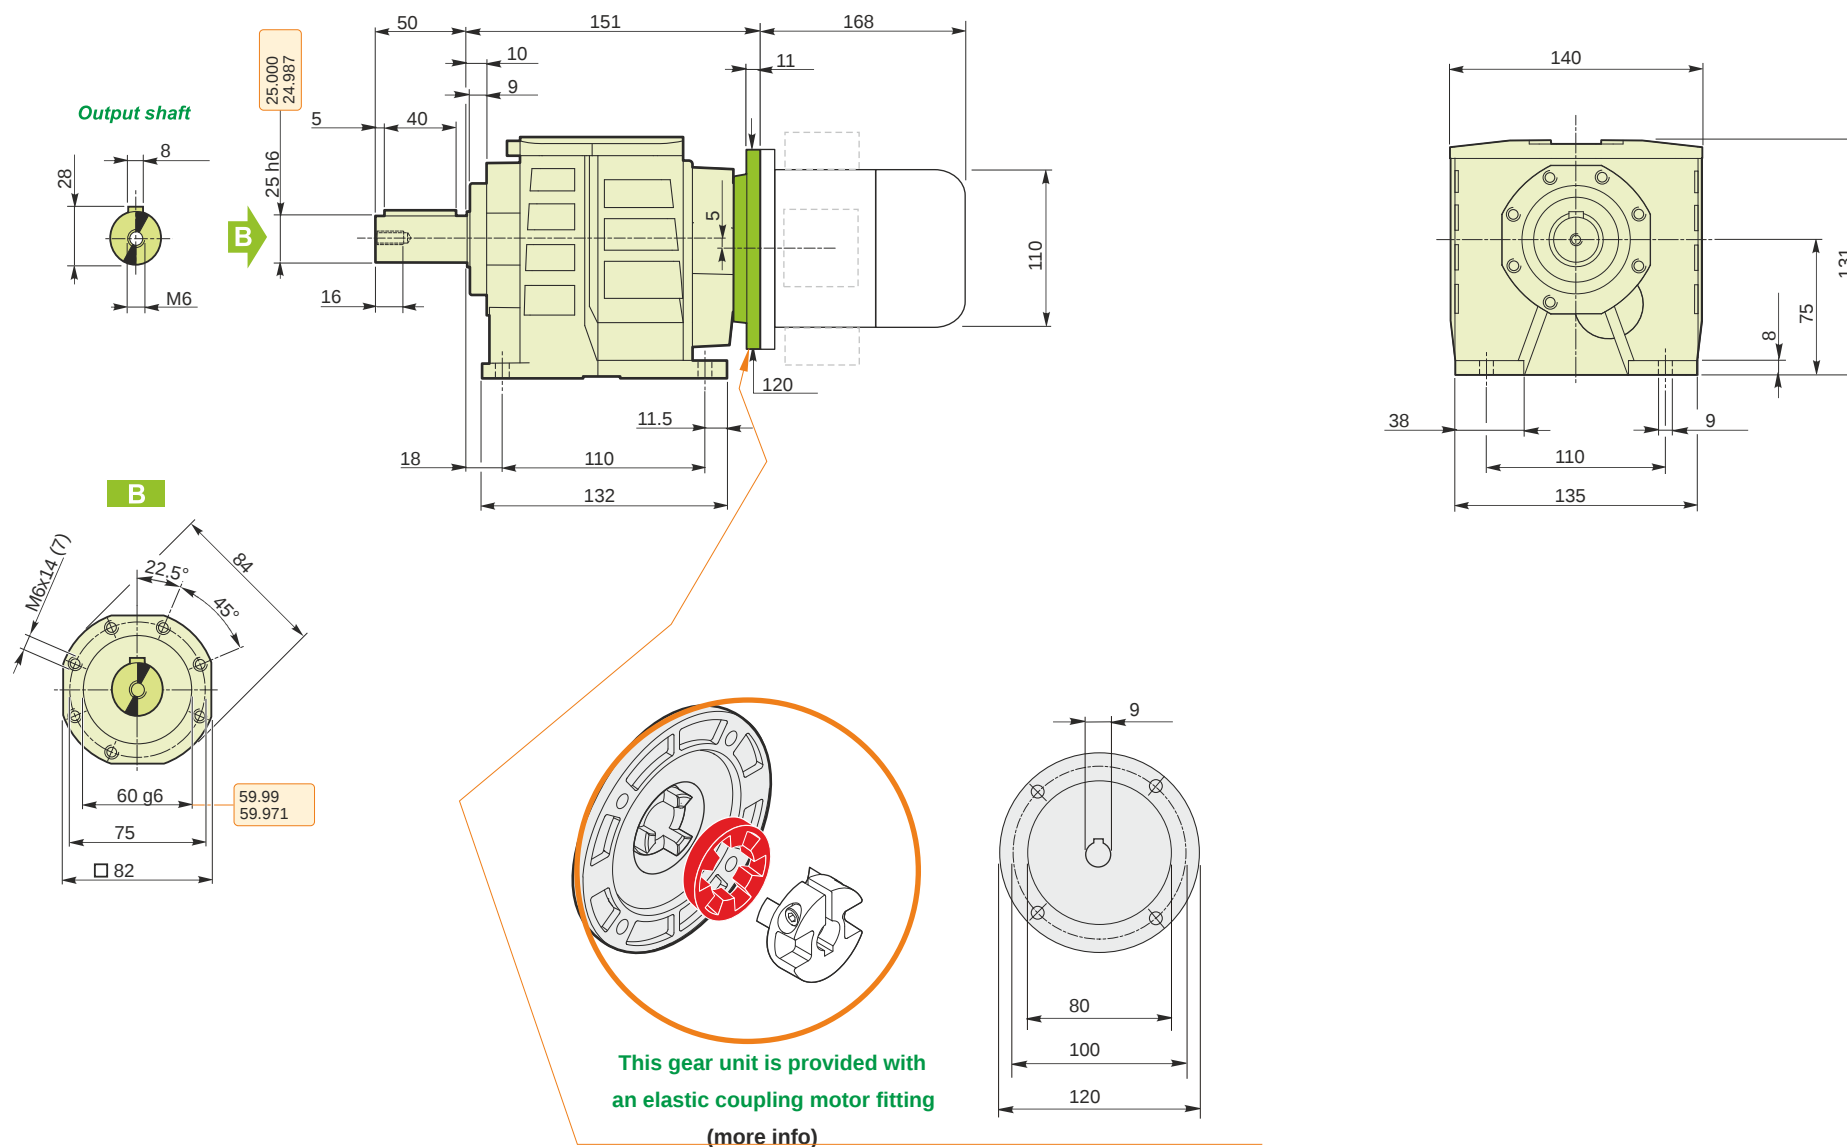

**M RD 13 B3 H1 268.54 56 B5 AU 25x50 MT 0.06 kW 56 A4 B5 X3**

## Mounting positions

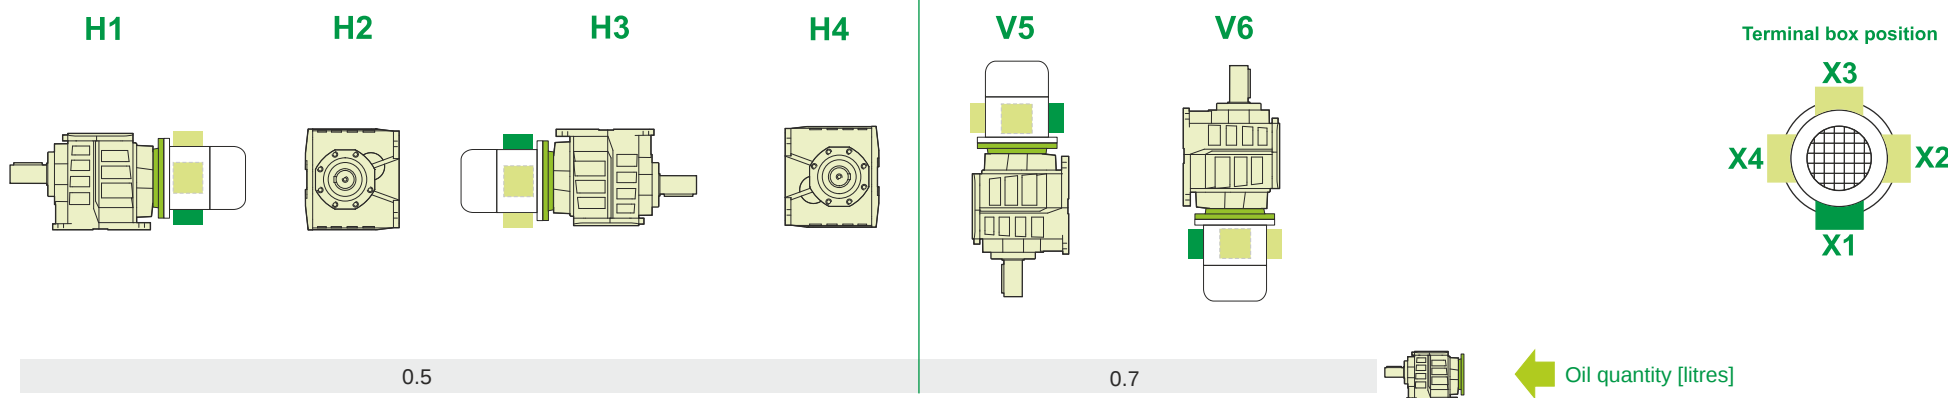

Lubricant type: Long life synthetic oil ISO VG320

## Direction of rotation



## Weight

|                     |     |
|---------------------|-----|
| Gear unit [kg]      | 4.8 |
| Electric motor [kg] | 2.6 |

**M RD 13 B3 H1 268.54 56 B5 AU 25x50 MT 0.06 kW 56 A4 B5 X3**