

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	3.54
Ratio (i=)		395.72
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.06
Service factor		0.5
Rated Power P1	[kW]	0.03

Warning! The torque generated by the selected motor is above the gearbox rated output torque; please refer to the gearbox rated output torque.

Output data


Gear unit	M RD 13 B3 H1 395.72 56 B5 AU 25x50 MT 0.06 kW 56 A4 B5 X3	
Type		RD - Helical gearboxes
Input type		M
Size		13
Ratio (i=)		395.72
Input flange		B5
Mounting position		H1
Input speed	[rpm]	1400
Output speed	[rpm]	3.54
Rated output torque	[Nm]	70
Service Factor		0.5
Efficiency		0.94
Inertia moment	[kgm ²]	0.000194
Gear unit configuration		
Fixing		Feet
Output shaft		AU 25x50
Output radial and axial loads		
Output radial load	[N]	2200
Output axial load	[N]	440

Electric motor

Size		56 A4
Poles		4
Power	[kW]	0.06


Electric motor configuration

Motor flange		B5
Terminal box position		X3

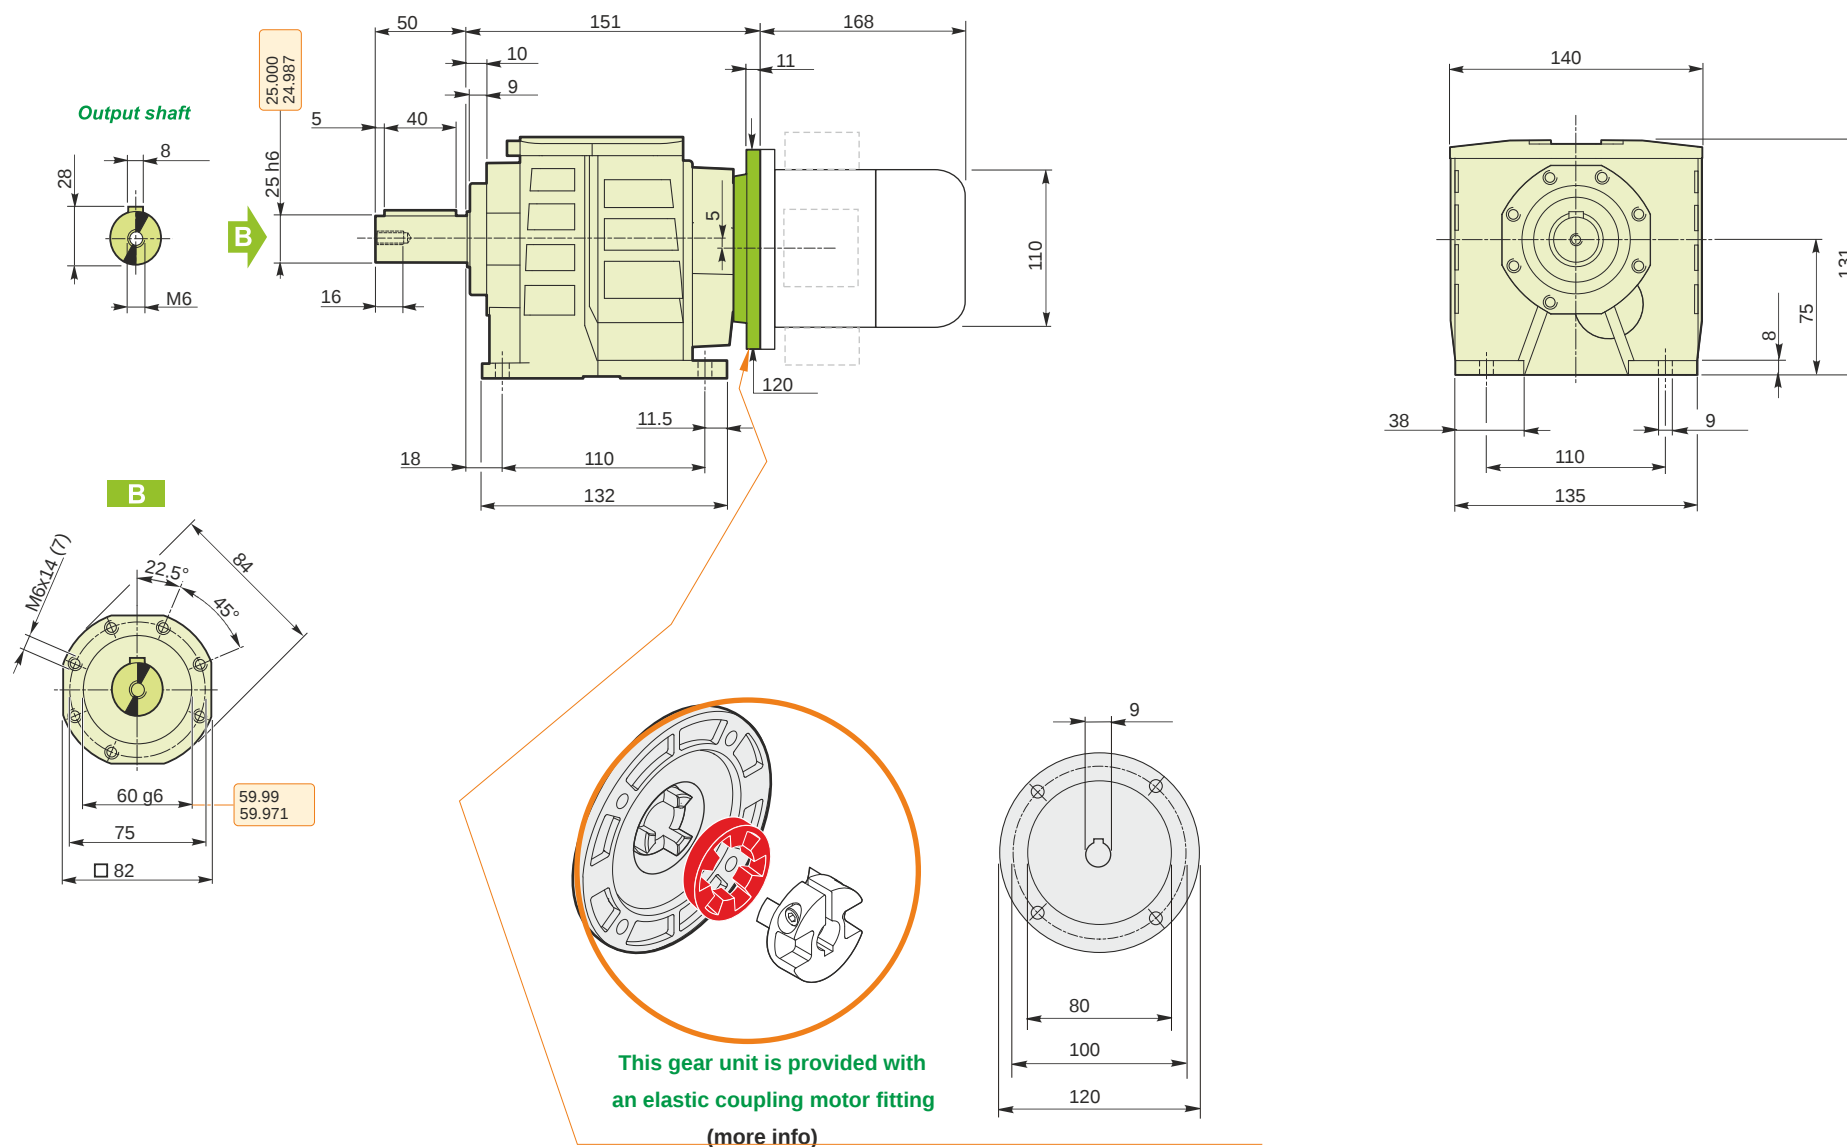


M RD 13 B3 H1 395.72 56 B5 AU 25x50 MT 0.06 kW 56 A4 B5 X3

Mounting positions

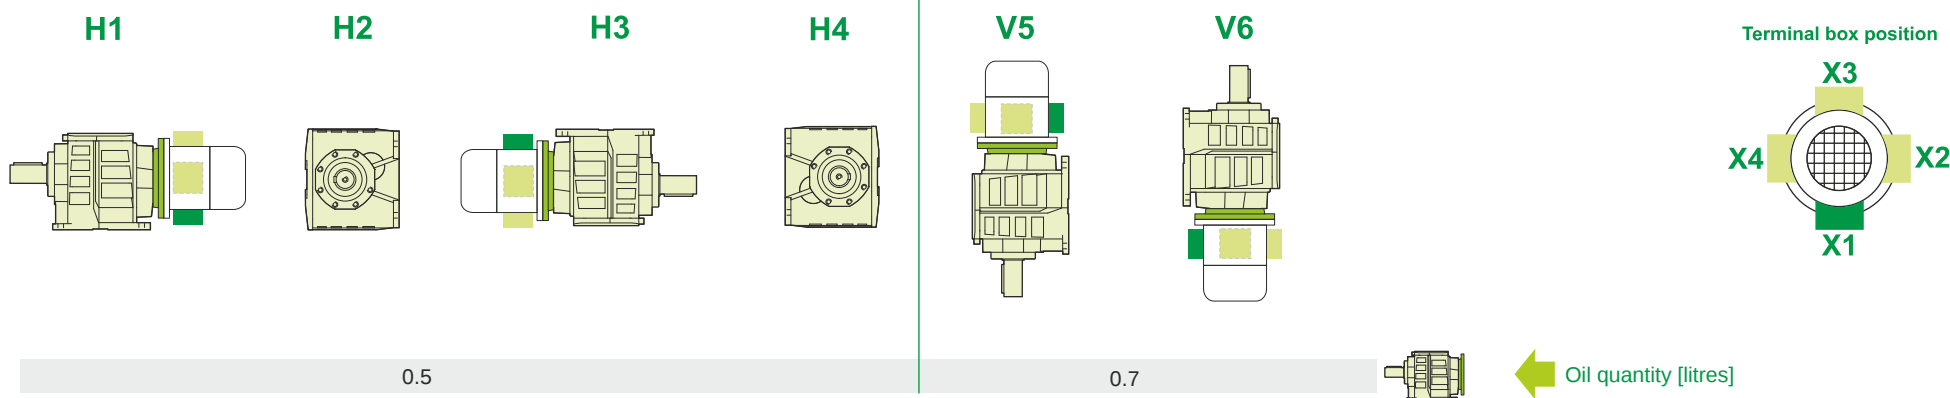

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

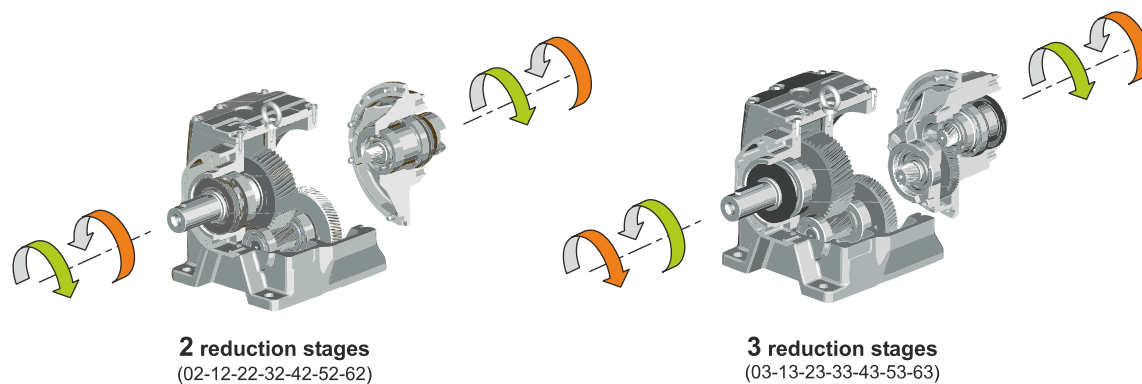

Weight

Gear unit [kg]	4.8
Electric motor [kg]	2.6

M RD 13 B3 H1 395.72 56 B5 AU 25x50 MT 0.06 kW 56 A4 B5 X3