

Input data

System of measurement		Metric
Input type		Coupling for electric motor
Input speed	[rpm]	1400
Output speed	[rpm]	20
Ratio (i=)		70
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.25
Service factor		1
Rated Power P1	[kW]	0.25

Output data

Gear unit F RT 50 B3 70 71 B14 AC 24

Type		RT - Worm speed reducers
Input type		F (Elastic coupling)
Size		50
Ratio (i=)		70
Input flange		B14
Input speed	[rpm]	1400
Output speed	[rpm]	20
Rated output torque	[Nm]	63.27
Service Factor		1
Efficiency		0.53
Inertia moment	[kgm ²]	0.000047

Gear unit configuration

Output shaft		Hollow output shaft
Fixing		Universal
Version		B3

Output radial and axial loads





Ball bearings output radial load	[N]	2800
Taper bearings output radial load	[N]	4200
Ball bearings output axial load	[N]	560
Taper bearings output axial load	[N]	840

Accessories



Hollow output shaft		AC 24
---------------------	--	-------




Electric motor coupling

Size		71 A4
Poles n.		4
Power	[kW]	0.25

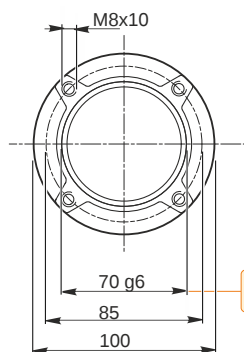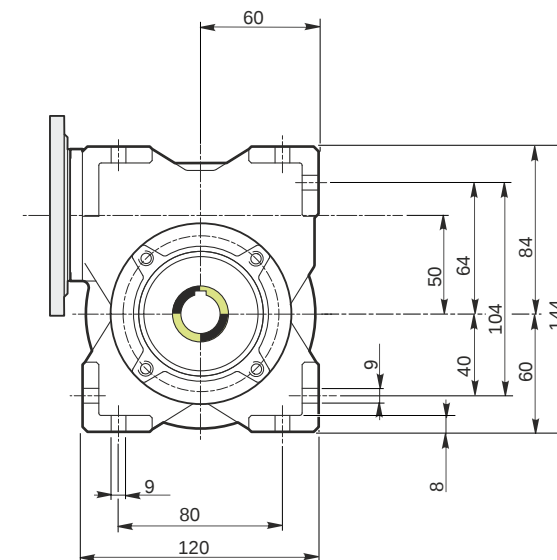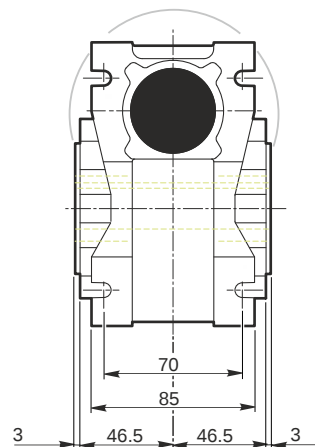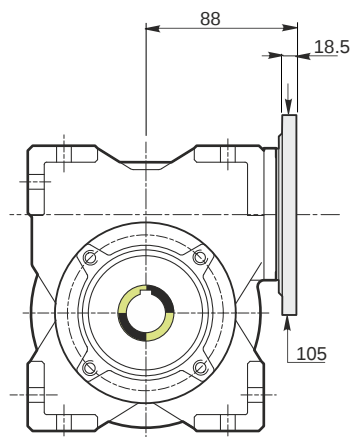


Hollow output shaft






This gear unit is provided with an elastic coupling motor fitting

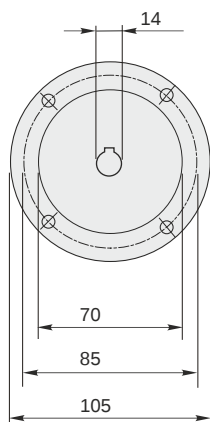

Mounting positions


B3




B6




B7




B8



V5



V6




0.13



Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

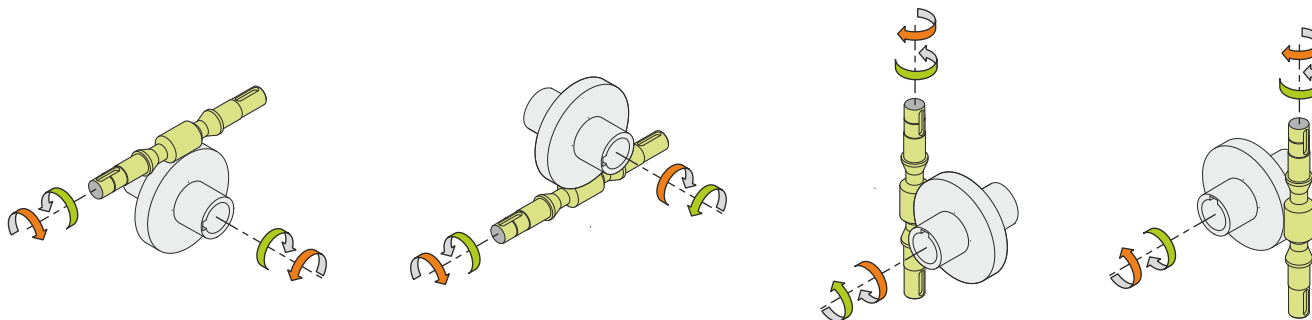

Weight

Gear unit [kg] 3.8

Gearing data

Axial module 1.1
Number of starts 1
Lead angle 2° 44'
Pressure angle 20°

Backdriving

Static self-locking
No back-driving
Low dynamic back-driving

F RT 50 B3 70 71 B14 AC 24