

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	57.19
Ratio (i=)		24.48
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	4
Service factor		1
Rated Power P1	[kW]	4.05

Output data

Gear unit	M RD 42 B3 H1 24.48 112 B14 AU 35x70 MT 4 kW 112 A4 B14 X3
------------------	---

Type		RD - Helical gearboxes
Input type		M
Size		42
Ratio (i=)		24.48
Input flange		B14
Mounting position		H1
Input speed	[rpm]	1400
Output speed	[rpm]	57.19
Rated output torque	[Nm]	641.24
Service Factor		1
Efficiency		0.96
Inertia moment	[kgm ²]	0.000783

Gear unit configuration

Fixing		Feet
Output shaft		AU 35x70

Output radial and axial loads


Output radial load	[N]	6000
Output axial load	[N]	1200

Electric motor

Size		112 A4
Poles		4
Power	[kW]	4


Electric motor configuration

Motor flange		B14
Terminal box position		X3

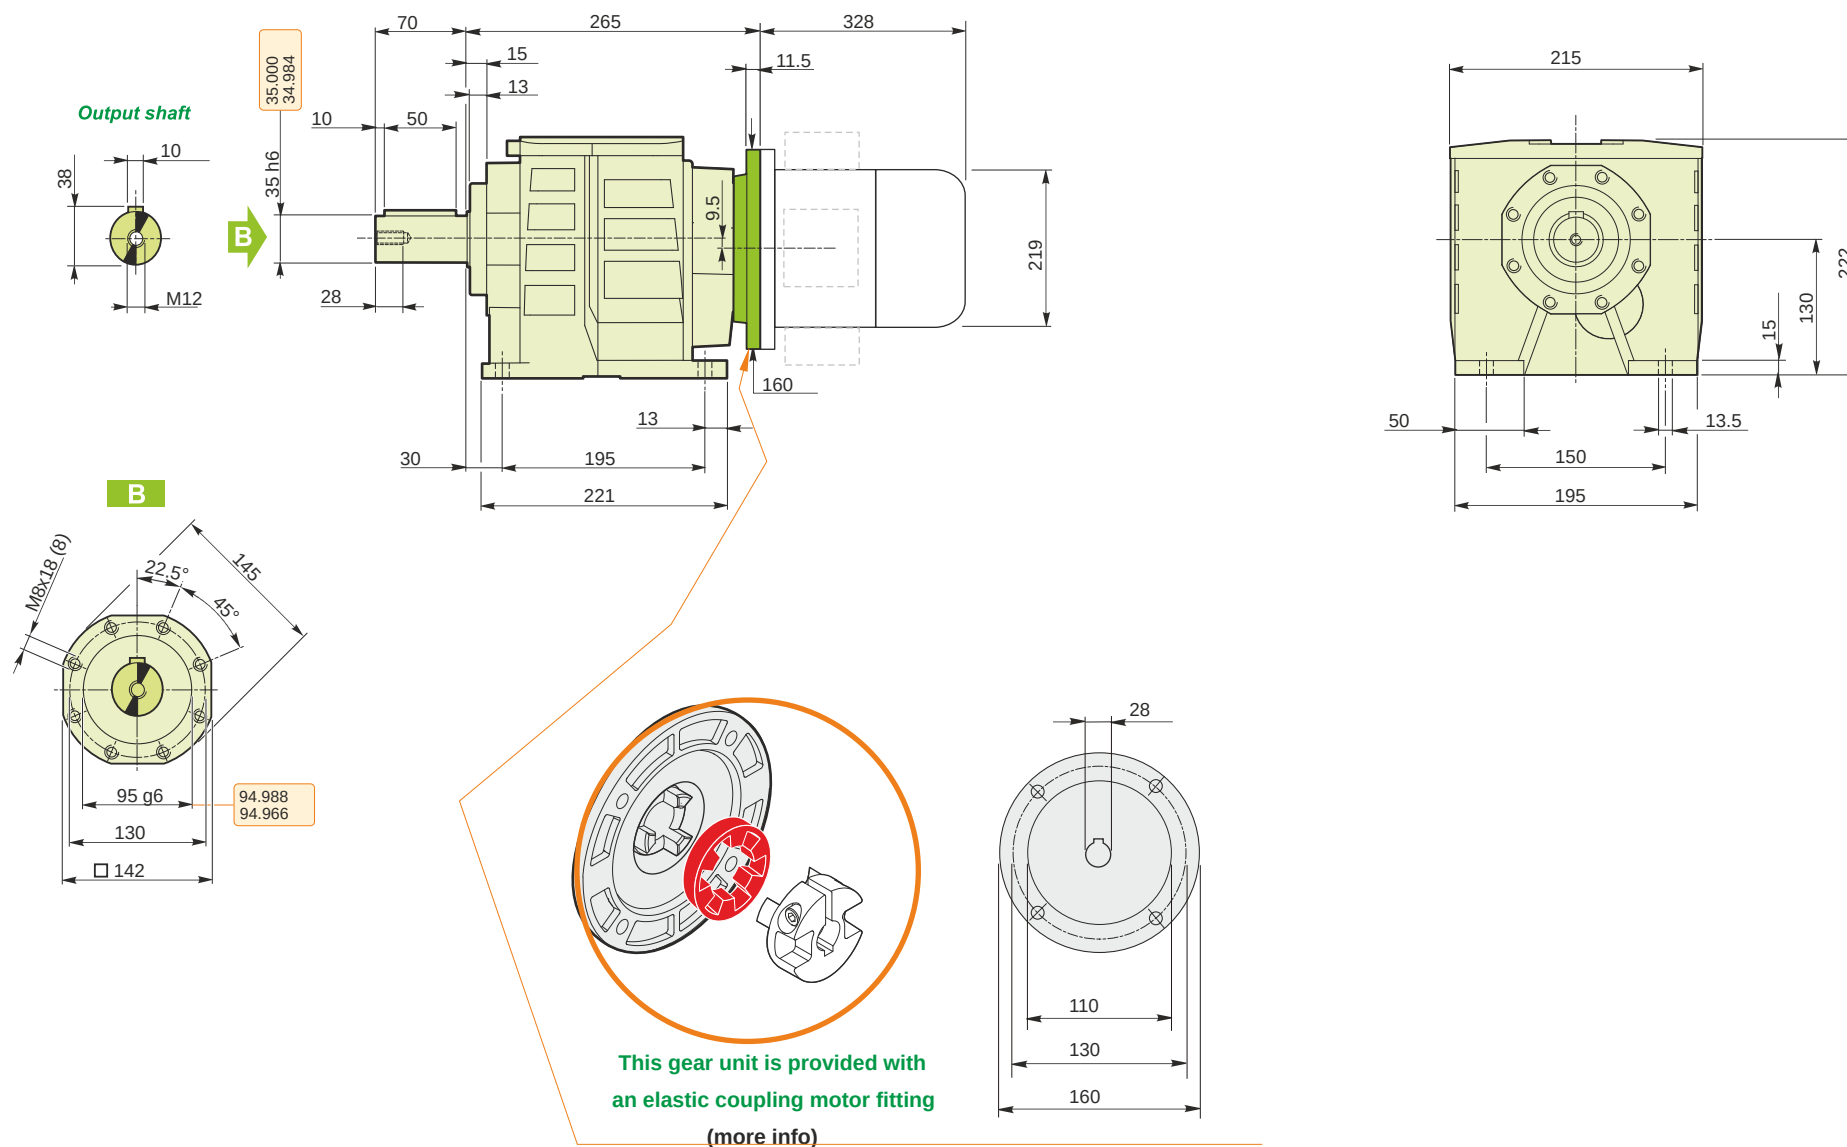


M RD 42 B3 H1 24.48 112 B14 AU 35x70 MT 4 kW 112 A4 B14 X3

Mounting positions

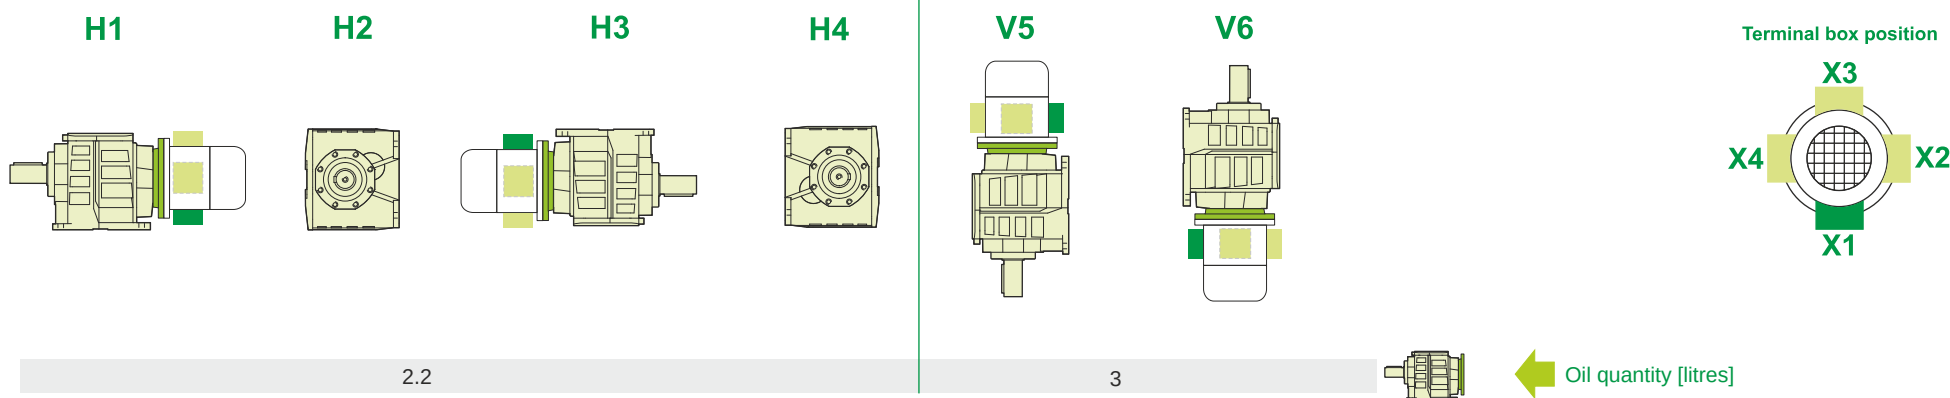

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

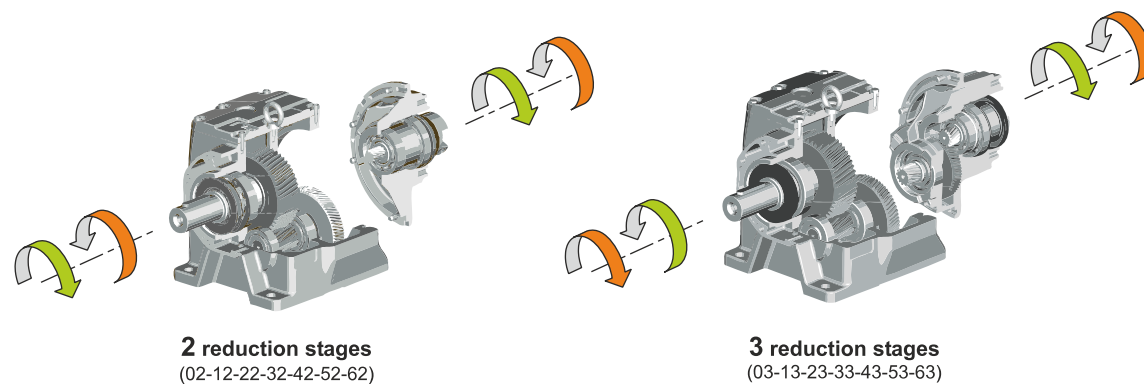

Weight

Gear unit [kg]	20
Electric motor [kg]	29