

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	8.9
Ratio (i=)		157.3
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	2.2
Service factor		1
Rated Power P1	[kW]	2.28

Output data

Gear unit	M RD 63 B3 H1 157.3 100 B5 AU 60x120 MT 2.2 kW 100 A4 B5 X3
------------------	--

Type		RD - Helical gearboxes
Input type		M
Size		63
Ratio (i=)		157.3
Input flange		B5
Mounting position		H1
Input speed	[rpm]	1400
Output speed	[rpm]	8.9
Rated output torque	[Nm]	2218.99
Service Factor		1
Efficiency		0.94
Inertia moment	[kgm ²]	0.004269

Gear unit configuration

Fixing		Feet
Output shaft		AU 60x120

Output radial and axial loads


Output radial load	[N]	12300
Output axial load	[N]	2460

Electric motor

Size		100 A4
Poles		4
Power	[kW]	2.2


Electric motor configuration

Motor flange		B5
Terminal box position		X3

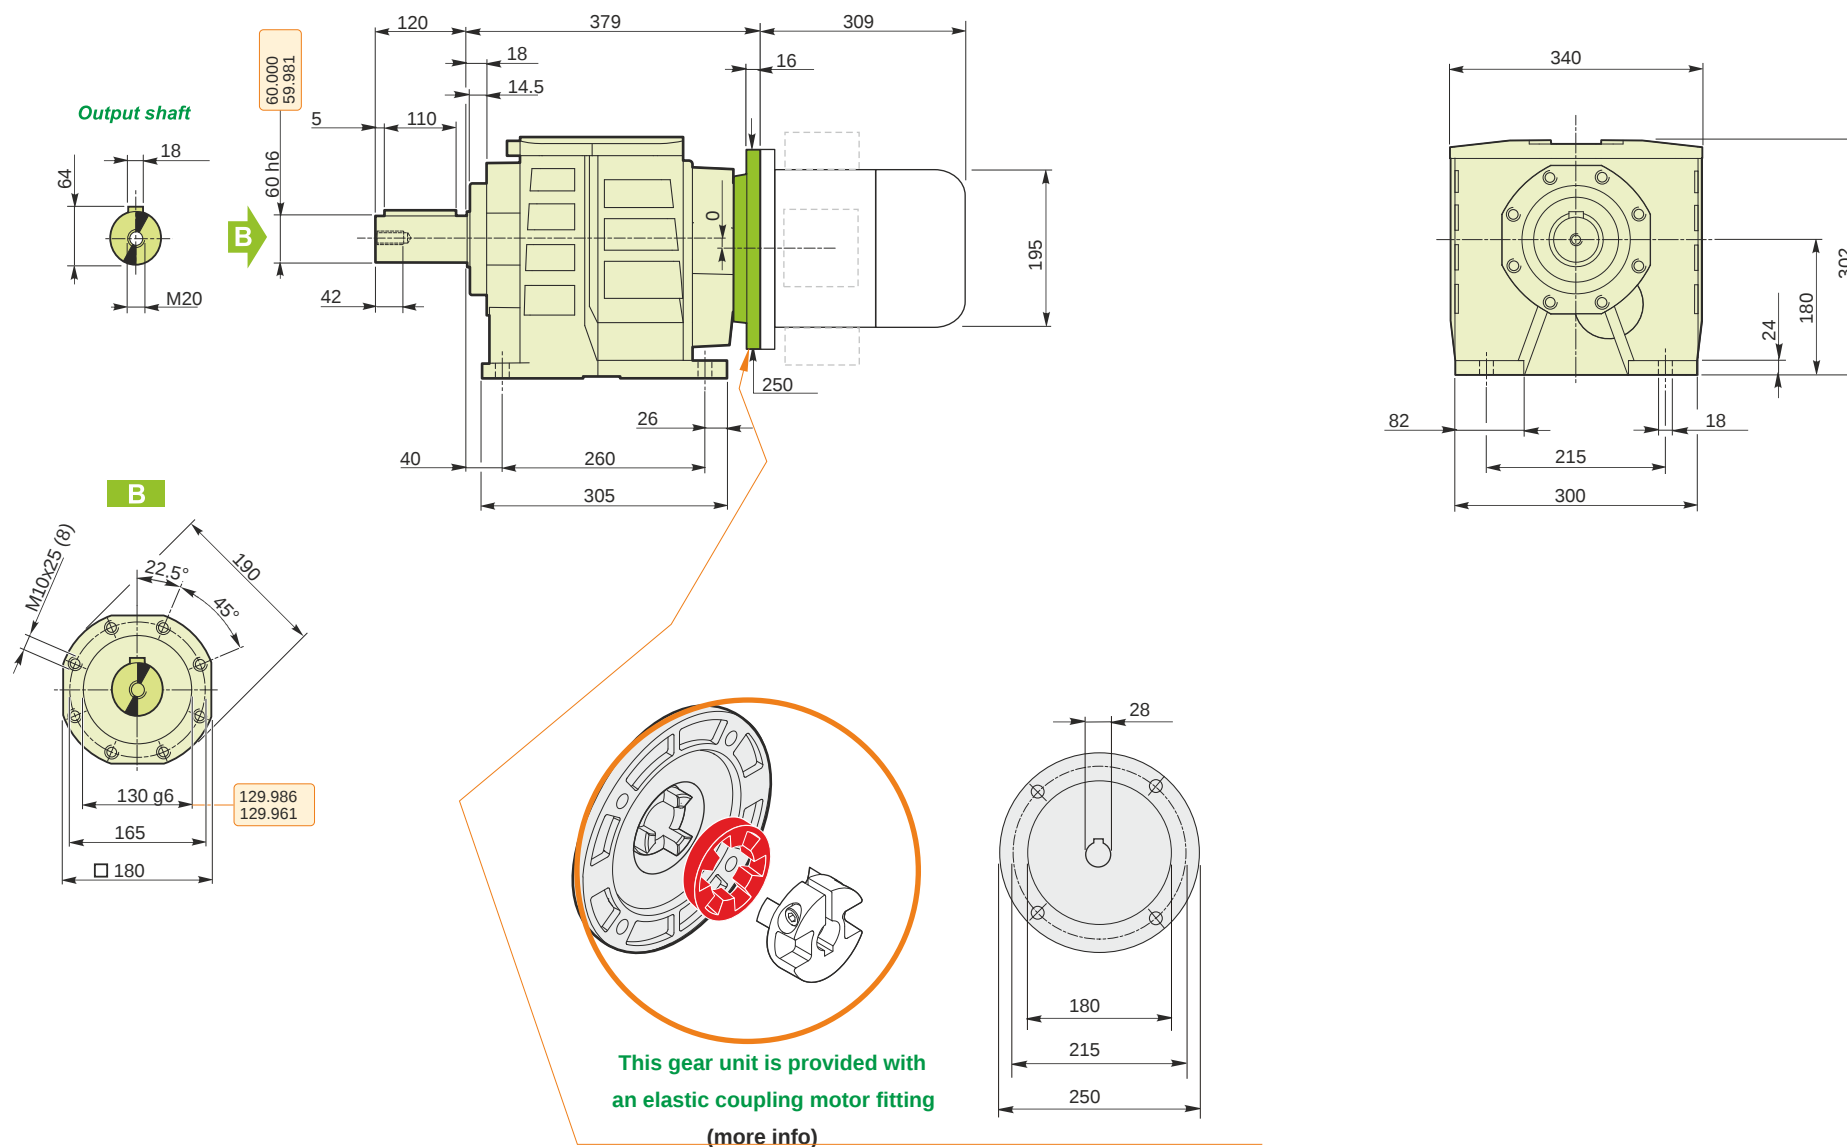


M RD 63 B3 H1 157.3 100 B5 AU 60x120 MT 2.2 kW 100 A4 B5 X3

Mounting positions

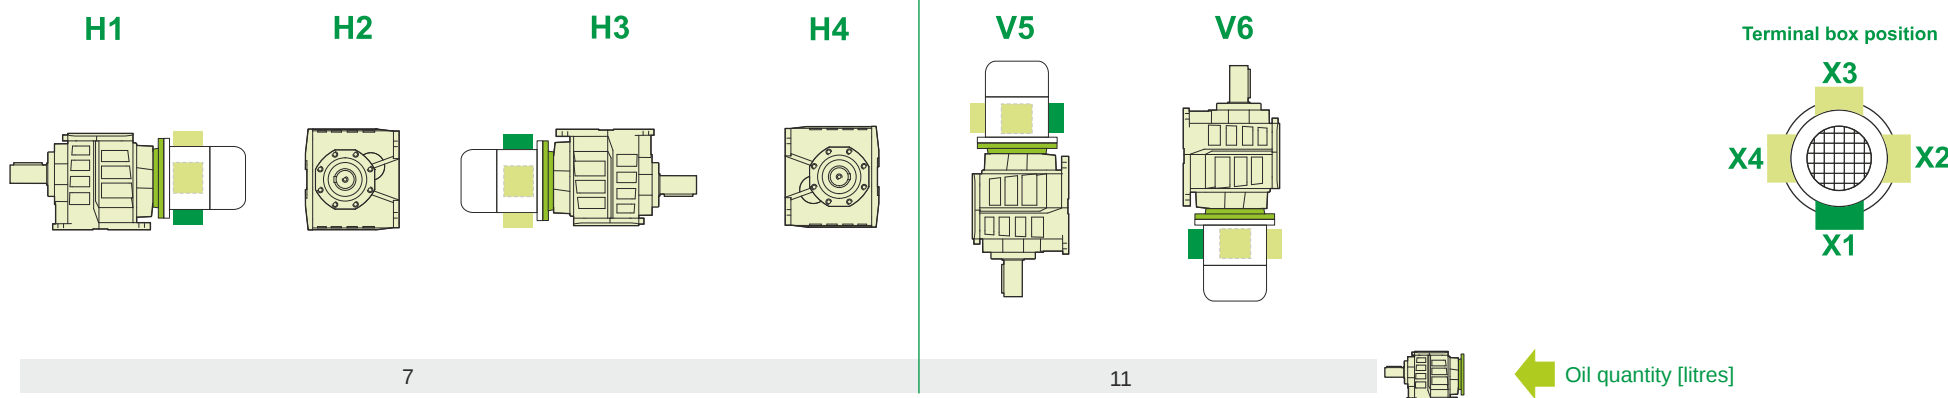

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

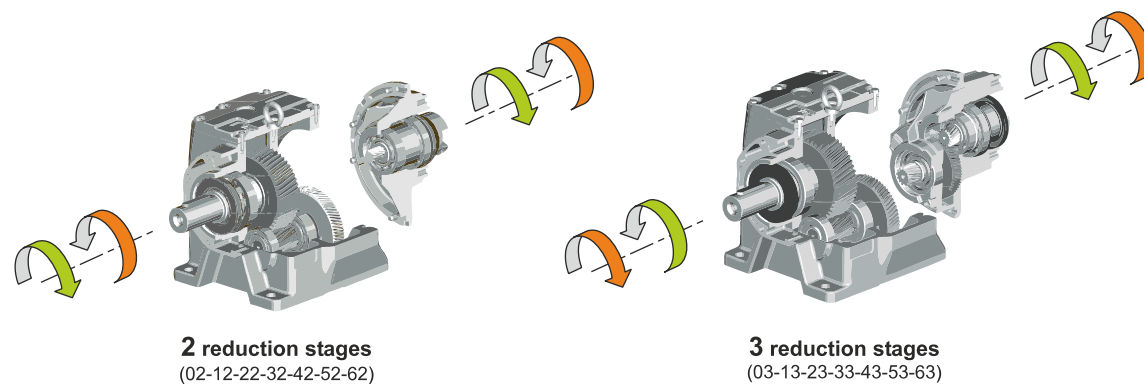

Weight

Gear unit [kg]	70
Electric motor [kg]	21

M RD 63 B3 H1 157.3 100 B5 AU 60x120 MT 2.2 kW 100 A4 B5 X3