

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	5.27
Ratio (i=)		265.6
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	1.5
Service factor		0.9
Rated Power P1	[kW]	1.35

Output data

Gear unit	M RD 63 B3 H1 265.6 90 B5 AU 60x120 MT 1.5 kW 90 L4 B5 X3
------------------	--

Type		RD - Helical gearboxes
Input type		M
Size		63
Ratio (i=)		265.6
Input flange		B5
Mounting position		H1
Input speed	[rpm]	1400
Output speed	[rpm]	5.27
Rated output torque	[Nm]	2554.6
Service Factor		0.9
Efficiency		0.94
Inertia moment	[kgm ²]	0.004077

Gear unit configuration

Fixing		Feet
Output shaft		AU 60x120

Output radial and axial loads


Output radial load	[N]	13000
Output axial load	[N]	2600

Electric motor

Size		90 L4
Poles		4
Power	[kW]	1.5


Electric motor configuration

Motor flange		B5
Terminal box position		X3

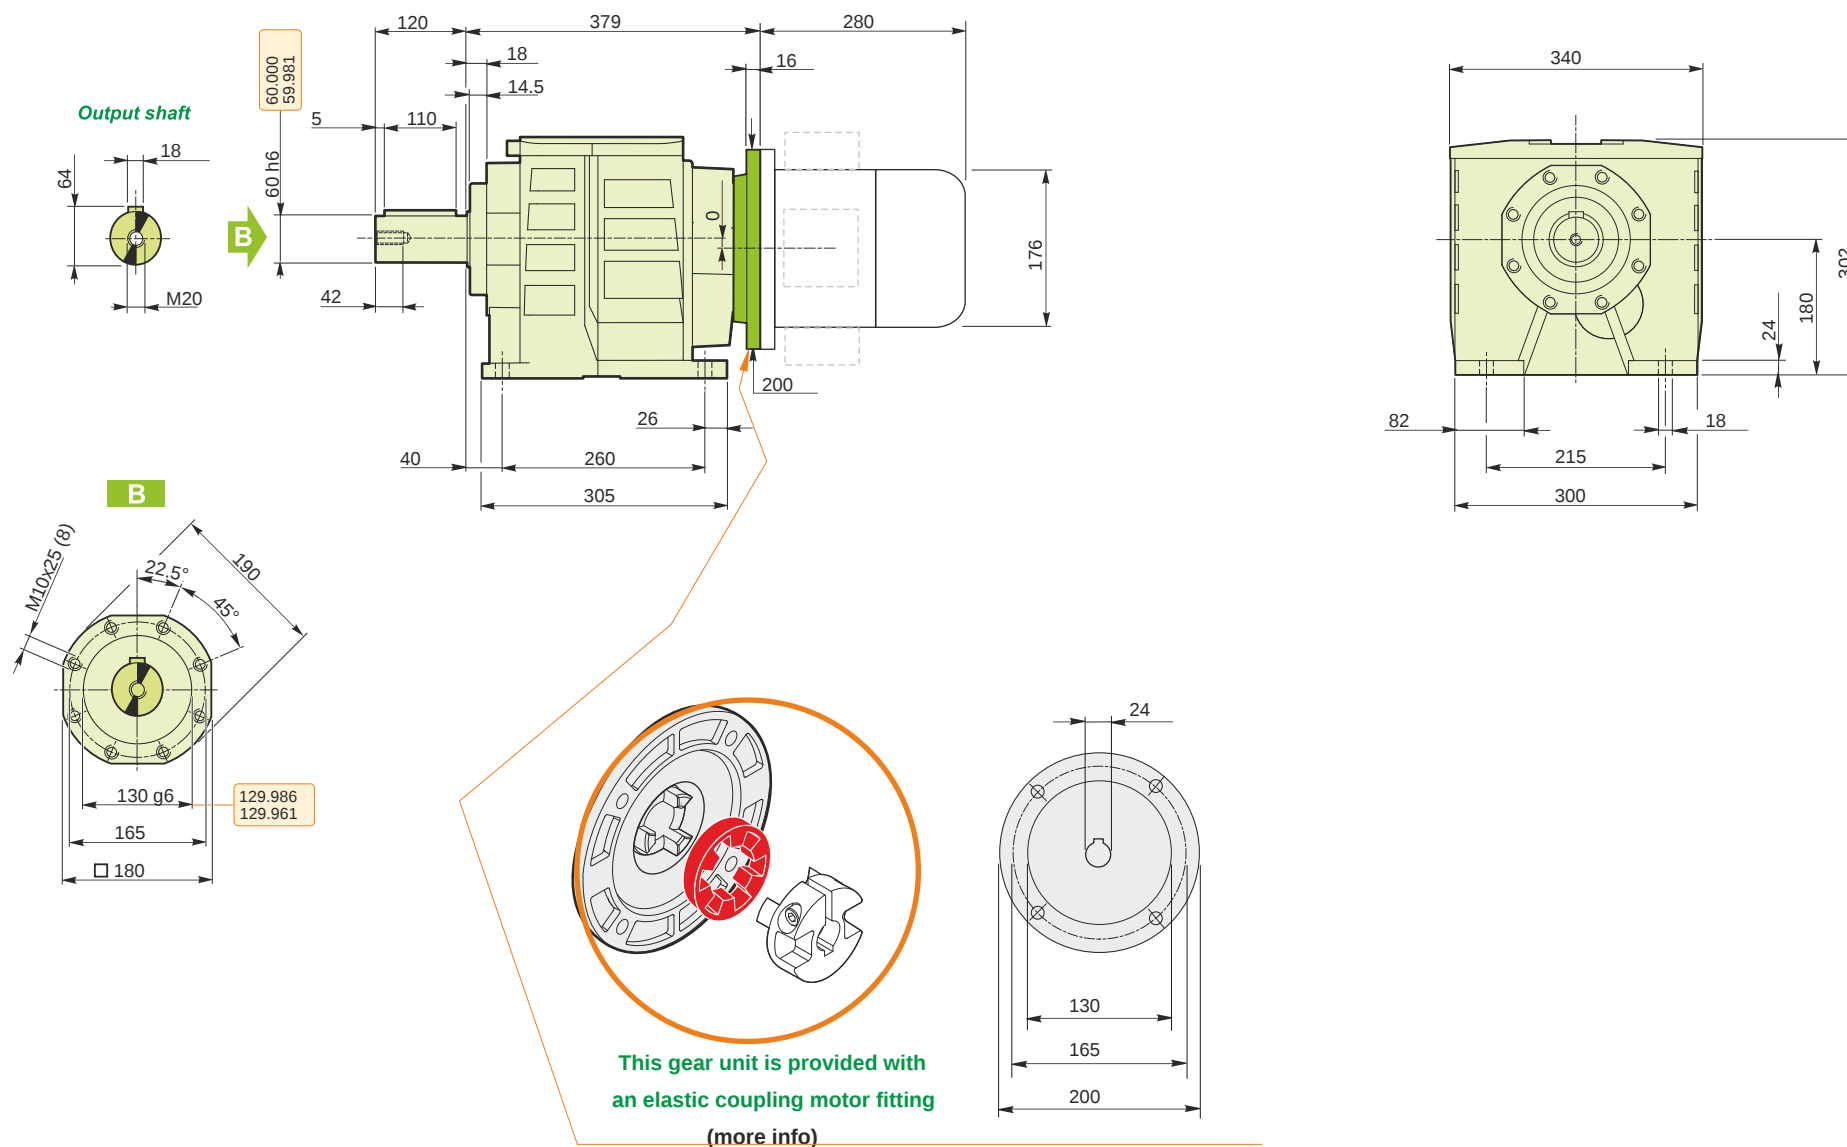

M RD 63 B3 H1 265.6 90 B5 AU 60x120 MT 1.5 kW 90 L4 B5 X3

Mounting positions

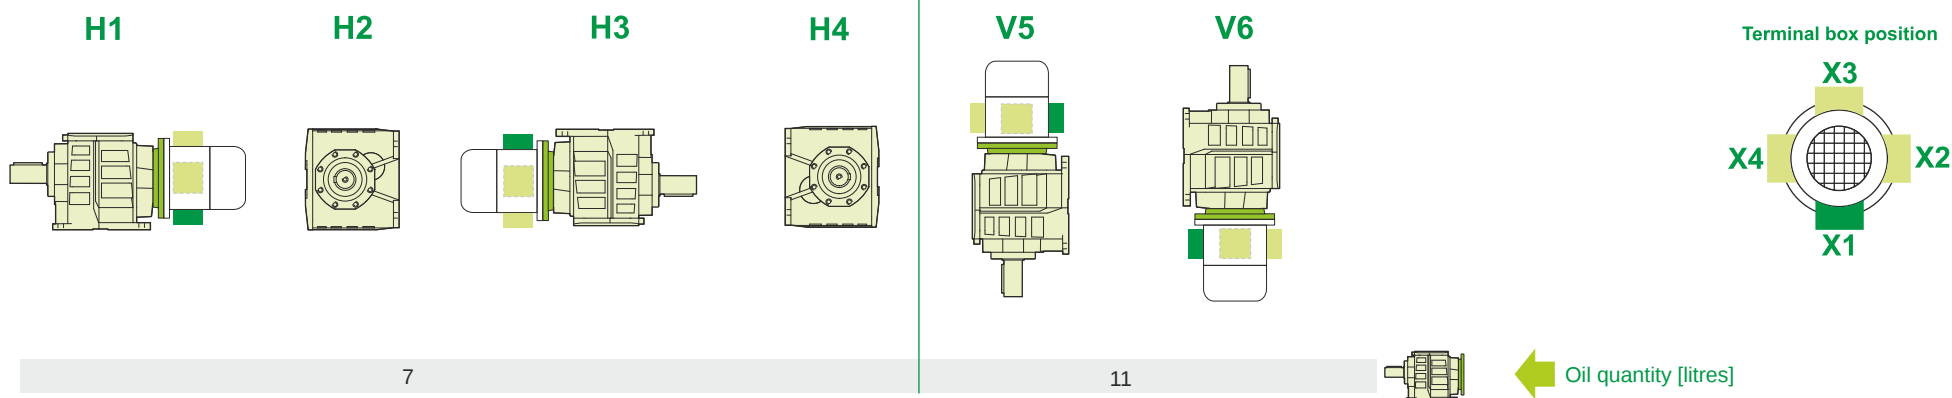

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

Gear unit [kg]	70
Electric motor [kg]	13.5

M RD 63 B3 H1 265.6 90 B5 AU 60x120 MT 1.5 kW 90 L4 B5 X3