

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	3.75
Ratio (i=)		373.3
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	1.1
Service factor		0.9
Rated Power P1	[kW]	0.96

Output data

Gear unit	M RD 63 B3 H1 373.3 90 B5 AU 60x120 MT 1.1 kW 90 S4 B5 X3
------------------	--

Type		RD - Helical gearboxes
Input type		M
Size		63
Ratio (i=)		373.3
Input flange		B5
Mounting position		H1
Input speed	[rpm]	1400
Output speed	[rpm]	3.75
Rated output torque	[Nm]	2633.02
Service Factor		0.9
Efficiency		0.94
Inertia moment	[kgm ²]	0.00408

Gear unit configuration

Fixing		Feet
Output shaft		AU 60x120

Output radial and axial loads


Output radial load	[N]	15700
Output axial load	[N]	3140

Electric motor

Size		90 S4
Poles		4
Power	[kW]	1.1


Electric motor configuration

Motor flange		B5
Terminal box position		X3

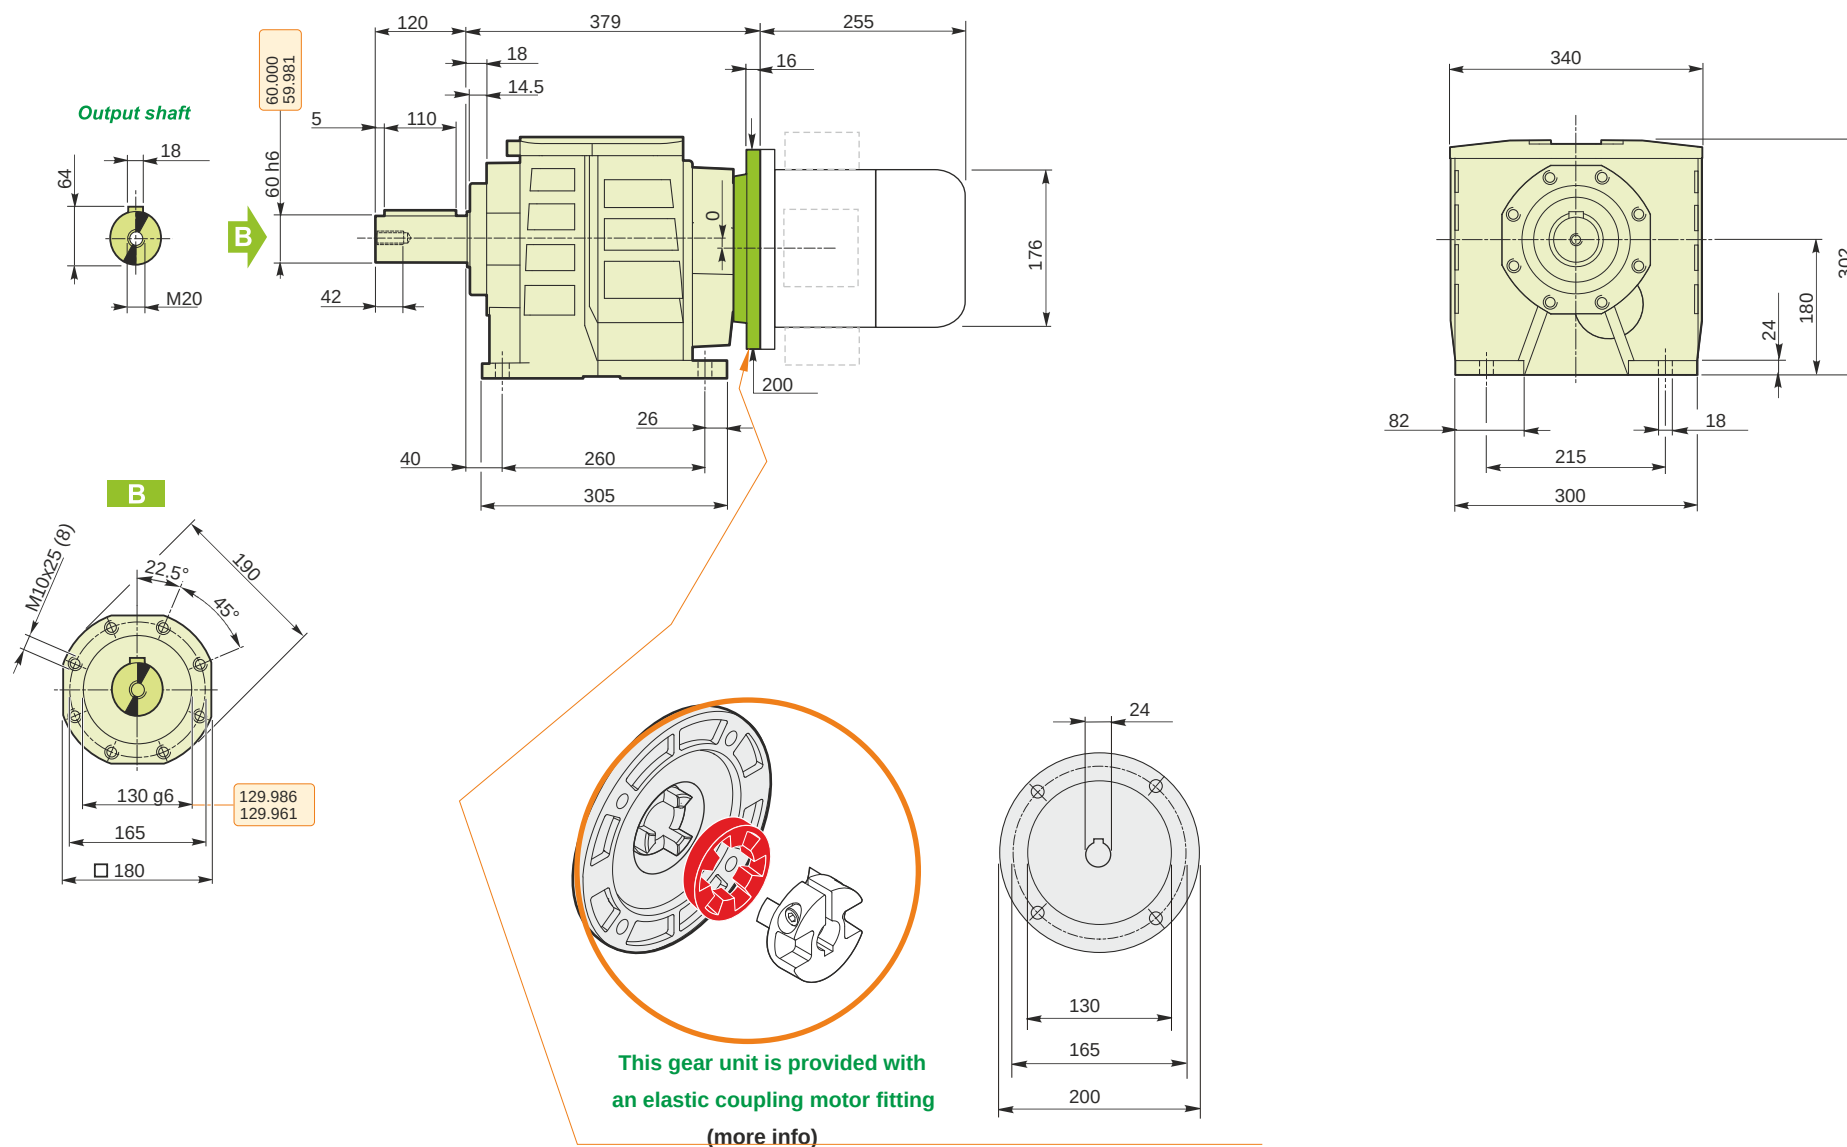


M RD 63 B3 H1 373.3 90 B5 AU 60x120 MT 1.1 kW 90 S4 B5 X3

Mounting positions

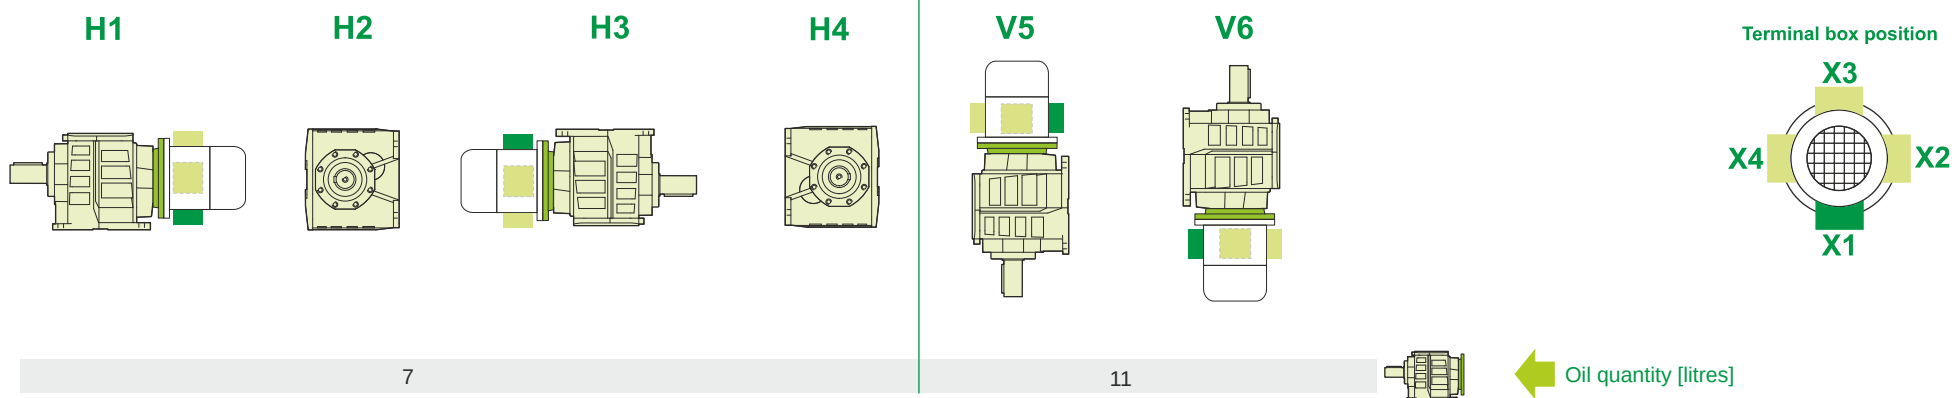

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

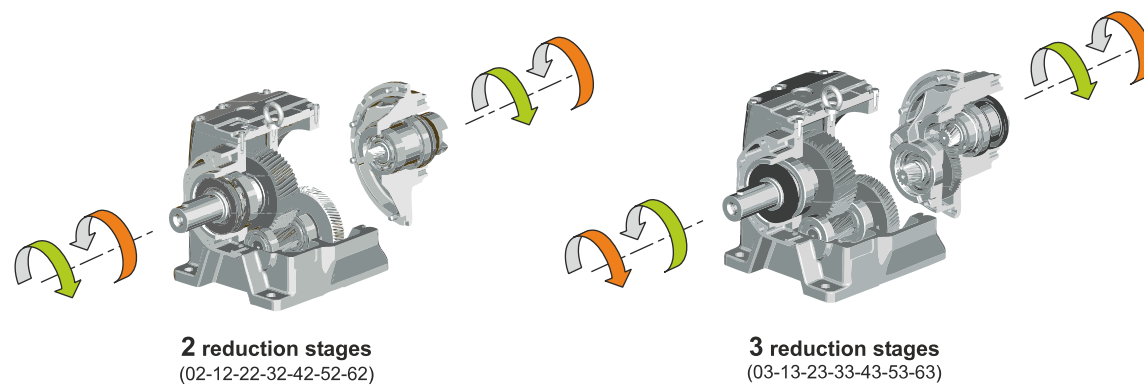

Weight

Gear unit [kg]	70
Electric motor [kg]	12